

CONNECT SYSTEM ©



OVERVOLTAGE PROTECTION



UV PROTECTION



WATERPROOF PROTECTION

CONNECT SYSTEM Range


Description: CONNECT SYSTEM: wiring 230-240V AC / DMX 100% reliable. Accessories for connexions of LED products controlled in DMX, power supply directly on 230-240V AC sector.

Products: X-POWER FLOOD DMX RGBW Connect System
 X-LINE QUATTRO DMX RGBW Connect System
 X-LINE³ Connect System
 X-LINE UP² Connect System


References

- 890-9520 Input cable XLR male plug IP20 / female product connector IP68
- 890-9525 extension cable DMX/230V 1m female & male connectors IP68
- 890-9530 extension cable DMX/230V 2.5m female & male connectors IP68
- 890-9535 extension cable DMX/230V 5m female & male connectors IP68
- 890-9540 extension cable DMX/230V 10m female & male connectors IP68
- 890-9545 Output cable male connector DMX IP68 / XLR female plug IP20
- 890-9550 DMX terminal IP68
- 890-9555 Waterproof cable L50 cm DMX 2x0.22 + 230V 3G1.5 with connectors IP68

CONNECT SYSTEM Details

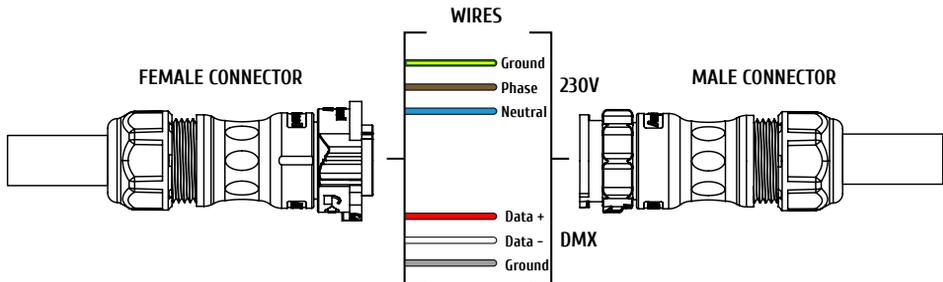


INPUT CABLE

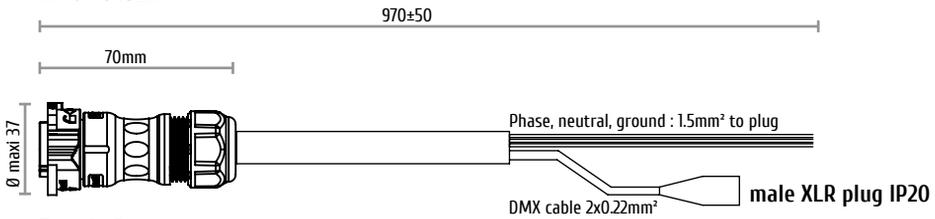

Female Connector


230-240 VAC EXTENSIONS CABLE

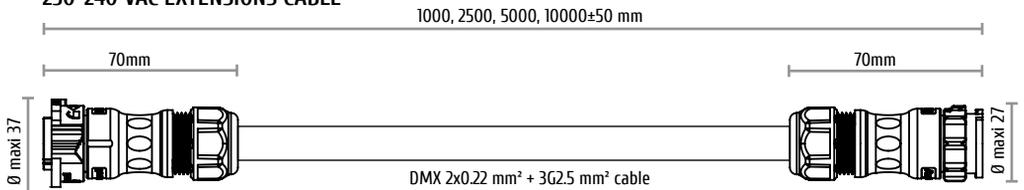

Female Connector


Connecteur mâle

OUTPUT CABLE

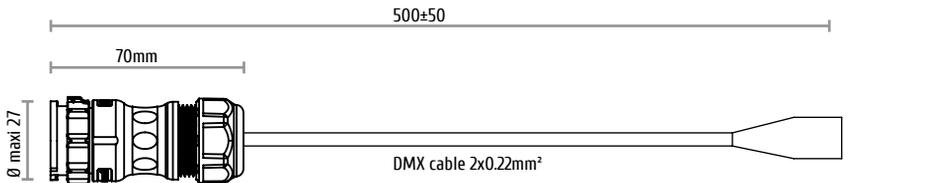

Male Connector

DMX TERMINAL

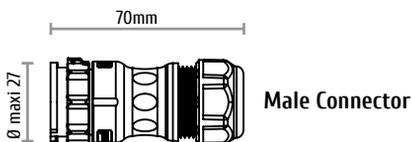

CONNECT SYSTEM wiring

