


**X-LINE MINI - LED every 25mm - 12W to 48W - up to 4968 lm - 340 mm to 1240 mm**  
**820-2935 X-LINE MINI 24 700mA CONTROL WHITE MIX 2x5° L640mm 24W IP66**

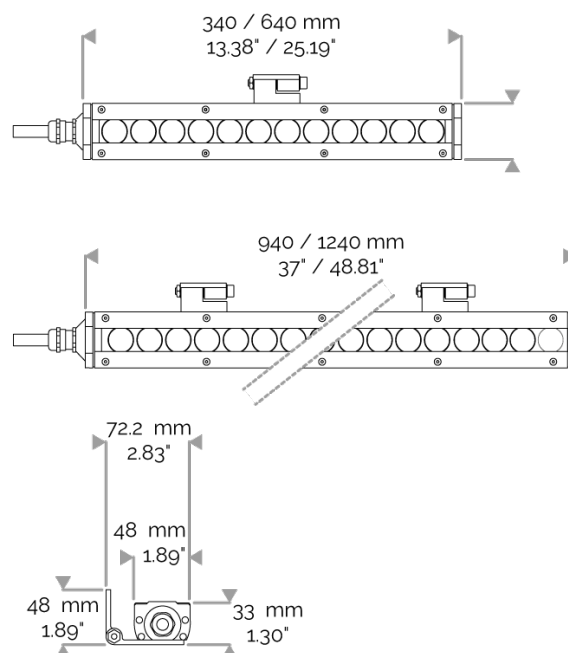

# X-LINE MINI - LED every 25mm - 12W to 48W - up to 4968 lm - 340 mm to 1240 mm

## 820-2935 X-LINE MINI 24 700mA CONTROL WHITE MIX 2x5° L640mm 24W IP66

### APPLICATION

High-power LED luminaire for architectural outdoor lighting. DO NOT RECESS.  
Backlight or accentuation light for use on cornices, rooves, diffused surfaces, walls, columns etc ...



### LIGHTING FEATURES

CRI70. High-power LED luminaire. LED spacing 1 LED every 25 mm. Monochrome version, RGB MIX or WHITE MIX.



### ELECTRICAL FEATURES

Luminaires are wired in series with a 700mA power supply + 10 kV/5 kA surge protector. Control is to be specified when ordering. Default cable length 1.5m.

### CABLES USED

Fixed version: 2 x 0.5 mm<sup>2</sup> cable: black- and red+. Length: 150cm.  
Control version: 6 x 0.5 mm<sup>2</sup> cable: red channel (red+ and red/black-), green channel (green+ and green/black-), blue channel (blue+ and blue/black-). Length: 150cm.

### MECHANICAL FEATURES

IP66, IK07. Anodized aluminium profile. Clear PMMA. Silicone gasket. Delta Seal® treated stainless steel fasteners. Glare shield comes in raw aluminium with the RAL colour to be specified. Weights: 340mm: 0,75 kg. 640mm: 1,4 kg. 940mm: 2 kg. 1240mm: 2,5 kg.

### WARRANTY

5-year warranty: on LED module and driver (see the FLUX conditions).

**Lifetime: 60 000 hours L80 B10**

### LUMEN DATA

Lumen nominal total (lm)	2488
Lumen nominal total warm white 3000K (lm)	776
Lumen nominal total neutral white 4000K (lm)	828
Lumen nominal total cold white 6500K (lm)	884
Lumen actual total (lm)	2060,1
Lumen actual total warm white 3000K (lm)	642,5
Lumen actual total neutral white 4000K (lm)	685,6
Lumen actual total cold white 6500K (lm)	732
lm/W LED total	102,6
lm/W LED warm white 3000K	96
lm/W LED neutral white 4000K	102,5
lm/W LED cold white 6500K	109,4
Qty LED	24
Ta max.	30°C
Tj (at 25°C)	85°C

### POWER

Product Led Power (W)	24,2
-----------------------	------

