


X-LINE MINI - LED every 25mm - 12W to 48W - up to 4968 lm - 340 mm to 1240 mm
820-2985-HT X-LINE MINI 48 350mA CONTROL WHITE MIX 2x5° L1240mm 24W IP66

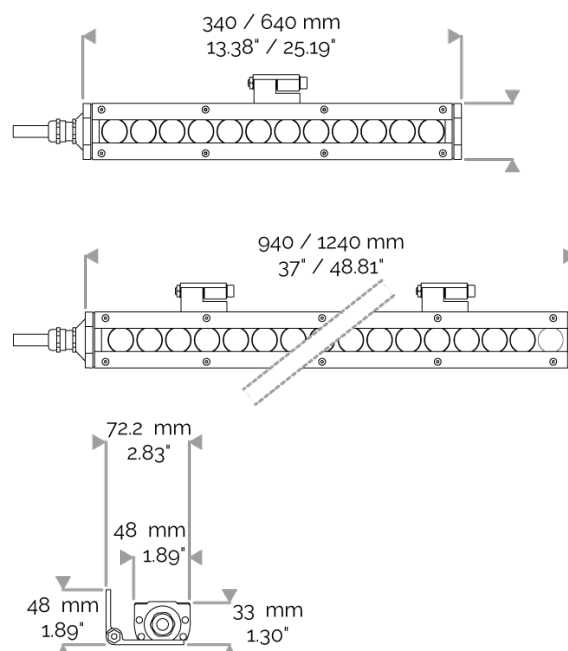

X-LINE MINI - LED every 25mm - 12W to 48W - up to 4968 lm - 340 mm to 1240 mm

820-2985-HT X-LINE MINI 48 350mA CONTROL WHITE MIX 2x5° L1240mm 24W IP66

APPLICATION

High-power LED luminaire for architectural outdoor lighting. DO NOT RECESS.
Backlight or accentuation light for use on cornices, rooves, diffused surfaces, walls, columns etc ...



LIGHTING FEATURES

CRI70. High-power LED luminaire. LED spacing 1 LED every 25 mm. Monochrome version, RGB MIX or WHITE MIX.



ELECTRICAL FEATURES

Luminaires are wired in series with a 700mA power supply + 10 kV/5 kA surge protector. Control is to be specified when ordering. Default cable length 1.5m.

CABLES USED

Fixed version: 2 x 0.5 mm² cable: black- and red+. Length: 150cm.
Control version: 6 x 0.5 mm² cable: red channel (red+ and red/black-), green channel (green+ and green/black-), blue channel (blue+ and blue/black-). Length: 150cm.

MECHANICAL FEATURES

IP66, IK07. Anodized aluminium profile. Clear PMMA. Silicone gasket. Delta Seal® treated stainless steel fasteners. Glare shield comes in raw aluminium with the RAL colour to be specified. Weights: 340mm: 0,75 kg. 640mm: 1,4 kg. 940mm: 2 kg. 1240mm: 2,5 kg.

WARRANTY

5-year warranty: on LED module and driver (see the FLUX conditions).

Lifetime: 60 000 hours L80 B10

LUMEN DATA

Lumen nominal total (lm)	2921,6
Lumen nominal total warm white 3000K (lm)	920
Lumen nominal total neutral white 4000K (lm)	968
Lumen nominal total cold white 6500K (lm)	1033,6
Lumen actual total (lm)	2419,1
Lumen actual total warm white 3000K (lm)	761,8
Lumen actual total neutral white 4000K (lm)	801,5
Lumen actual total cold white 6500K (lm)	855,8
lm/W LED total	121,7
lm/W LED warm white 3000K	115
lm/W LED neutral white 4000K	121
lm/W LED cold white 6500K	129,2
Qty LED	48
Ta max.	50°C
Tj (at 25°C)	85°C

POWER

Product Led Power (W)	24
-----------------------	----

