



**X-LINE UP<sup>2</sup> - Clear glass - 12W to 36W - up to 3726 lm - 350 mm to 950 mm**  
**822-3465-HT X-LINE UP<sup>2</sup> 12 230V CONTROL green 2x15° L350mm 6W IP67**



Light fixture

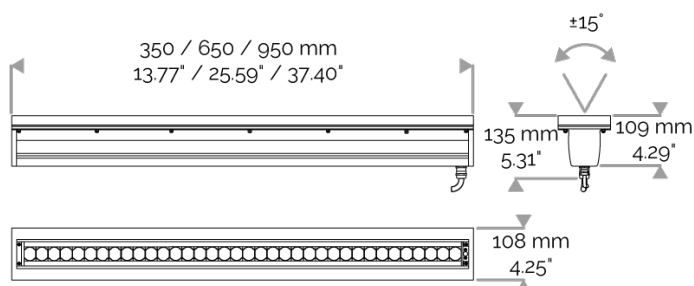

Blockout

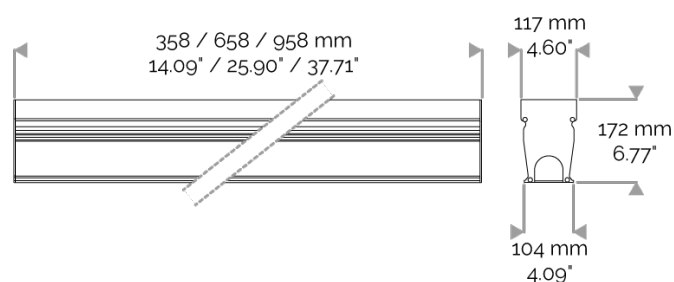



## X-LINE UP<sup>2</sup> - Clear glass - 12W to 36W - up to 3726 lm - 350 mm to 950 mm

### 822-3465-HT X-LINE UP<sup>2</sup> 12 230V CONTROL green 2x15° L350mm 6W IP67

#### APPLICATION

Inground luminaire (not suitable for walls and roads), adjustable LED for outdoor lighting or architectural lighting. This product requires good drainage.  
Accentuation, wallwasher and marker light.



#### LIGHTING FEATURES

CRI70. High-power LED luminaire. Monochrome version, RGB MIX or WHITE MIX.



#### ELECTRICAL FEATURES

230V mains connection. Integrated driver. Built-in 10 kV/5 kA surge protection. Control to be specified when ordering. Default cable length 1.5m. DMX version contains the plug and socket CONNECT SYSTEM for easy installation.

#### CABLES USED

Version fixe : câble HO7RN-F 3G1,5mm<sup>2</sup> : phase (marron), neutre (bleu) et terre (vert/jaune). Longueur : 150cm.

Version pilotable en DMX : câble CONNECT SYSTEM. Longueur : 50cm.

Version pilotable en DALI : câble HO7RN-F 3G1,5mm<sup>2</sup> : phase (marron), neutre (bleu) et terre (vert/jaune) + câble 2x0,5mm<sup>2</sup> : noir- et rouge+. Longueur : 150cm.

#### MECHANICAL FEATURES

IP67, IK10. 304 stainless steel frame. Body in painted aluminium. Glass (thickness 19 mm) clear. Adjustable clear glass version can be tilted +/- 15°. Supplied with blockout (thickness 5 mm) in Surtec 650 treated and painted aluminium. Weights: 350mm : 5,8 kg. 650mm : 10,3 kg. 950mm : 15 kg.

#### WARRANTY

5-year warranty: on LED module and driver (see the FLUX conditions).

**Lifetime: 60 000 hours L80 B10**

#### LUMEN DATA

|                                |       |
|--------------------------------|-------|
| Lumen nominal total green (lm) | 732   |
| lm/W LED green                 | 124,5 |
| Qty LED                        | 12    |
| Ta max.                        | 50°C  |
| Tj (at 25°C)                   | 85°C  |

#### INRUSH CURRENT

|                    |    |
|--------------------|----|
| Inrush Current (A) | 40 |
|--------------------|----|

#### POWER

|                       |     |
|-----------------------|-----|
| Product Led Power (W) | 5,9 |
|-----------------------|-----|