


**X-LINE MINI - LED every 75mm - 4W to 16W - up to 1656 lm - 340 mm to 1240 mm**  
**820-3115 X-LINE MINI 16 700mA warm white 3000K 2x10° L1240mm 16W IP66**

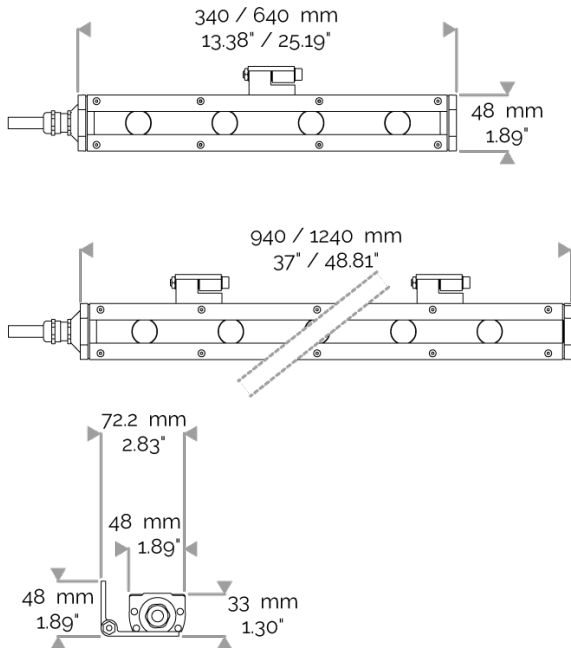

**APPLICATION**  
High-power LED luminaire for architectural outdoor lighting. DO NOT RECESS.  
Backlight or accentuation light for use on cornices, rooves, diffused surfaces, walls, columns etc...

**LIGHTING FEATURES**  
CRI70. High-power LED luminaire. LED spacing 1 LED every 75 mm. Monochrome version.

**ELECTRICAL FEATURES**  
Luminaires are wired in series with a 700mA power supply + 10 kV/5 kA surge protector. Default cable length 1.5m.

**CABLES USED**  
Fixed version: 2 x 0.5 mm<sup>2</sup> cable: black- and red+. Length: 150cm.  
Control version: 6 x 0.5 mm<sup>2</sup> cable: red channel (red+ and red/black-), green channel (green+ and green/black-), blue channel (blue+ and blue/black-). Length: 150cm.

**MECHANICAL FEATURES**  
IP66, IK07. Anodized aluminium profile. Clear PMMA. Silicone gasket. Delta Seal® treated stainless steel fasteners. Glare shield comes in raw aluminium with the RAL colour to be specified. Weights: 340mm: 0,75 kg. 640mm: 1,4 kg. 940mm: 2 kg. 1240mm: 2,5 kg.

**WARRANTY**  
5-year warranty: on LED module and driver (see the FLUX conditions).



**Lifetime: 60 000 hours L80 B10**

| LUMEN DATA                                |      |
|---|------|
| Lumen nominal total warm white 3000K (lm) | 1552 |
| lm/W LED warm white 3000K                 | 96   |
| Qty LED                                   | 16   |
| Ta max.                                   | 30°C |
| Tj (at 25°C)                              | 85°C |
| POWER                                     |      |
| Product Led Power (W)                     | 16,2 |