
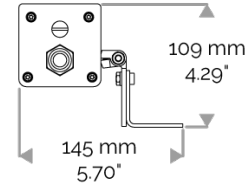
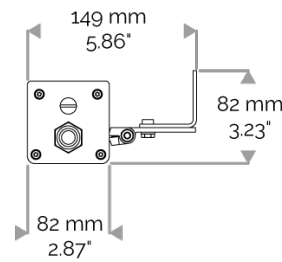


## X-LINE4 - DMX monochrome

810-4390-WL X-LINE4 60 230V WIRELESS DMX 2700K 2x5° L1537mm 60W IP66

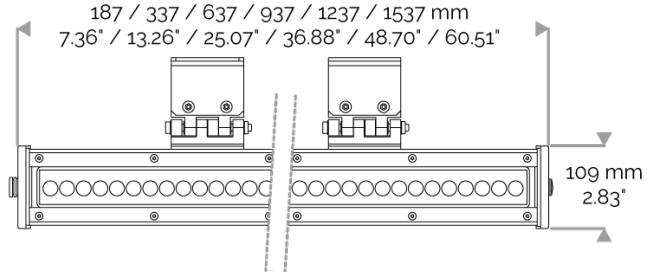

### APPLICATION

230V AC (except for the USA) high-power LED luminaire for outdoor lighting available. DO NOT RECESS. Accentuation lighting for architectural facades, shop fronts, sculptures, columns etc...

### LIGHTING FEATURES

CRI170. High-power LED luminaire. Monochrome DMX version.

### ELECTRICAL FEATURES

CONNECT SYSTEM for reliable and fast installation. Integrated DMX power supply. Built-in 10 kV/5 kA surge protection. For the USA please consult us.

### CABLES USED

DMX version: CONNECT SYSTEM cable. Length: 50cm.

### MECHANICAL FEATURES

IP66, IK06. Anodized aluminium profile. Clear PMMA. Silicone gasket. Delta Seal® treated stainless steel fasteners. Weights: 337mm : 2 kg. 637mm : 3,5 kg. 937mm : 4,5 kg. 1237mm : 6,2 kg. 1537mm : 7,1 kg.

### WARRANTY

5-year warranty: on LED module and driver (see the FLUX conditions).



**Lifetime: 60 000 hours L80 B10**

### LUMEN DATA

|   |      |
|---|------|
| Lumen nominal total warm white 2700K (lm) | 5820 |
| lm/W LED warm white 2700K                 | 96   |
| Qty LED                                   | 60   |
| Ta max.                                   | 30°C |
| Tj (at 25°C)                              | 85°C |

### INRUSH CURRENT

|                          |     |
|--------------------------|-----|
| Inrush Current (A)       | 105 |
| Inrush Current Time (µs) | 240 |

### POWER

|                       |      |
|-----------------------|------|
| Product Led Power (W) | 60,6 |
|-----------------------|------|

