


## X-LINE4 - DMX monochrome

810-4785-WL X-LINE4 48 230V WIRELESS DMX 4000K 2x22.5° L1237mm 48W IP66

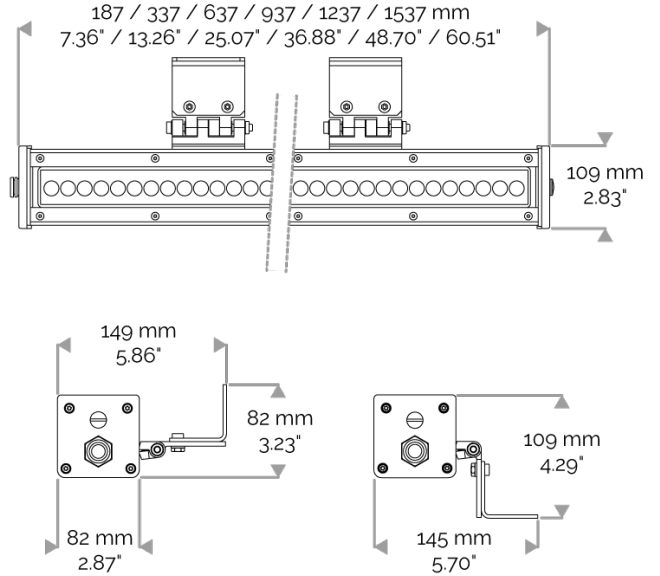

### APPLICATION

230V AC (except for the USA) high-power LED luminaire for outdoor lighting available. DO NOT RECESS. Accentuation lighting for architectural facades, shop fronts, sculptures, columns etc...

### LIGHTING FEATURES

CRI170. High-power LED luminaire. Monochrome DMX version.

### ELECTRICAL FEATURES

CONNECT SYSTEM for reliable and fast installation. Integrated DMX power supply. Built-in 10 kV/5 kA surge protection. For the USA please consult us.

### CABLES USED

DMX version: CONNECT SYSTEM cable. Length: 50cm.

### MECHANICAL FEATURES

IP66, IK06. Anodized aluminium profile. Clear PMMA. Silicone gasket. Delta Seal® treated stainless steel fasteners. Weights: 337mm : 2 kg. 637mm : 3,5 kg. 937mm : 4,5 kg. 1237mm : 6,2 kg. 1537mm : 7,1 kg.

### WARRANTY

5-year warranty: on LED module and driver (see the FLUX conditions).



**Lifetime: 60 000 hours L80 B10**

### LUMEN DATA

Lumen nominal total neutral white 4000K (lm)	4968
lm/W LED neutral white 4000K	102
Qty LED	48
Ta max.	30°C
Tj (at 25°C)	85°C

### INRUSH CURRENT

Inrush Current (A)	100
Inrush Current Time (µs)	210

### POWER

Product Led Power (W)	48,5
-----------------------	------

