


# ODO NANO COLUMN - Tamperproof & suitable for persons with reduced mobility - 16W - Up to 2523 lm

831-3305 ODO NANO COLUMN H 3m 8 LED 16W 4000K WALK IP66 CLI

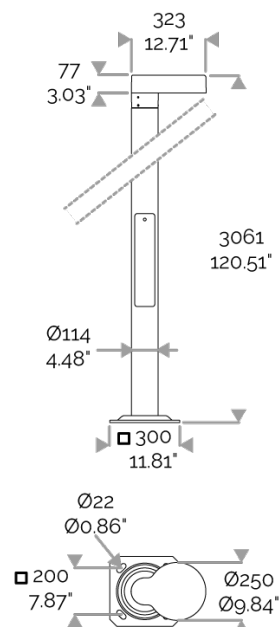

# ODO NANO COLUMN - Tamperproof & suitable for persons with reduced mobility - 16W - Up to 2523 lm

## 831-3305 ODO NANO COLUMN H 3m 8 LED 16W 4000K WALK IP66 CLI

### APPLICATION

Standard 3-m pole for path illumination, cycle lanes and pedestrian areas.

### LIGHTING FEATURES

CR170. Single circuit, direction of the LED light output to be specified when ordering: (Beam forwards). 8 LED optics cluster: WALK. Spacing up to 10 times the height of fire, lighting to the front up to 2 times the height.

### ELECTRICAL FEATURES

230V AC (except for the USA) mains connection. Zhaga LED module. Integrated Zhaga DALIdriver. Built-in 10 kV lightning and surge protection. Cable is not visible. Cable length to be specified in meters when ordering. Control to be specified when ordering (CLO (constant light output), AstroDIM, MainsDIM, StepDIM). Maximum ambient temperature: 30°C. For the USA please consult us.

### CABLES USED

For class I (AstroDIM, StepDIM, MainsDIM): HO7RN-F 5G1,5mm<sup>2</sup> cable (blue, brown, green/yellow, grey, black).

For class I (StepDIM): HO7RN-F 4G1,5mm<sup>2</sup> cable (grey, brown, green/yellow, black).

For class II (AstroDIM, StepDIM, MainsDIM): 4x1,5mm<sup>2</sup> cable (blue, brown, grey, black).

### MECHANICAL FEATURES

IP66, IK10+. Die-cast aluminium luminaire, anti-corrosion treatment prior to polyester powder coating. Extruded aluminium tube, thickness 6 mm. Decorative base plate. Position of the inspection hatch on left or right, opened with 2 tamper-proof "snake-eye" screws. Captive stainless steel fasteners with Delta Seal® galvanic tamperproof treatment. RAL colour to be specified when ordering.

Wind pressure = 0,15m<sup>2</sup>. Weight: 15 kg.

### STANDARDS

This product qualifies for RES-EC-104 Energy Saving Certificates.

### MAINTENANCE

Interchangeable LED modules

### WARRANTY

5-year warranty: on LED module and driver (see the FLUX conditions).



Walk



**Lifetime: 100 000 hours L80 B10**

### LUMEN DATA

Lumen nominal total neutral white 4000K (lm)	2523
lm/W LED neutral white 4000K	159
lm/W product neutral white 4000K	126
Qty LED	8
Ta max.	30°C
Tj (at 25°C)	85°C

### INRUSH CURRENT

Inrush Current (A)	26
Inrush Current Time (µs)	180

### POWER

Product Led Power (W)	15,9
Product Power (W)	20,1

