


## POWERFLOOD 18 - 230V - Monochrome - 77W - 10750 lm

829-0620 POWERFLOOD 18 230V fixed 6500K 2x3,7° Ø330mm 77W IP66

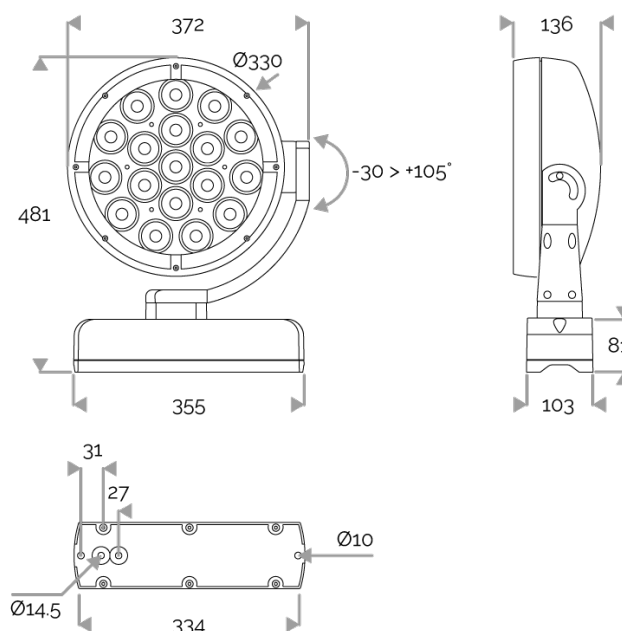

### APPLICATION

Monochrome LED projector for outdoor lighting.  
For use in urban lighting, squares, car parks, architectural accentuation etc...

### LIGHTING FEATURES

CRI70. 18 LED in white and 72 LED in colour.

### ELECTRICAL FEATURES

230V mains connection. Integrated driver in mounting base. Built-in 10 kV/5 kA surge protection.  
Concealed cable to be specified when ordering.

### MECHANICAL FEATURES

IP66, IK10. Cast aluminium, sandblasted RAL paint to be specified when ordering. Extra-white tempered glass. Silicone gasket. Captive stainless steel fasteners with Delta Seal®. Glare shield comes in raw aluminium with the RAL colour to be specified. Wind pressure = 0,15m². Weight: 16 kg.

### WARRANTY

5-year warranty: on LED module and driver (see the FLUX conditions).



**Lifetime: 60 000 hours L80 B10**

### LUMEN DATA

Lumen nominal total cold white 6500K (lm)	11232
lm/W LED cold white 6500K	145,5
lm/W product cold white 6500K	129,1
Qty LED	18
Ta max.	30°C
Tj (at 25°C)	85°C

### INRUSH CURRENT

Inrush Current (A)	60
Inrush Current Time (µs)	1000

### POWER

Product Led Power (W)	77,2
Product Power (W)	87